
MULTIPURPOSE KANTIWIST **CLAMPS - USA SERIES 672:** Made In U.S.A.

Lightweight and 40% stronger than "C" clamps. Floating jaws that always stay parallel. Designed to eliminate distorting or twisting action. Cantilever action provides 4: 1 clamping ratio. Built-in "V" blocks for round or rod stock. Full support, no loose pads to walk off center. Copper plated jaws & screws are ideal for welding clamps.

Model No.	Max. Opening "A"	Open Throat Depth "B"	Closed Throat Depth "E"	Order No.	Price
401 405 407 410 415 420 421 430 435 440	1 2 2-1/2* 3 4-1/2* 6 6* 9	1/2 1-1/8 2-7/16 1-1/4 2-1/4 2-1/8 4-1/2 3-3/8 6 5	1/2 1-1/4 1-13/16 1-3/4 3-13/16 3-3/8 5-1/2 5-1/4	6720401 6720405 6720407 6720410 6720415 6720420 6720421 6720430 6720435 6720440	


^{*}Deep throat type.

ROUND HANDLE CLAMPS KANTIWIST



Model No.	Max. Opening A	Open Throat Depth B	Closed Throat Depth E	Order No.	Price
396 401-1 403-1 405-1	3/4" 1 1-1/2 2	3/8" 1/2" 1-1/8" 1-1/8"	3/8" 1/2" 1" 1-1/4"	6720396 6724011 6724031 6724051	

QUICK ACTING FIXTURE CLAMPS

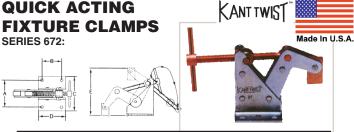

	lodel No.	Α	В	С	E	Order No.	Price
42	1-2	T-slot 2.908	1 - 1/2" Mounting 2 - 5/8" Mounting	2-11/16" 2-11/16" 3-3/4" 3-3/4"	4-1/8" 6-7/8"	6720411 6724112 6720423 6724231	

Tel: 201-518-8461 / Fax: 201-596-3427 650 Huyler St / So. Hackensack, NJ 07606 USA

"C" CLAMPS

SERIES 308:

HEAVY DUTY C-CLAMPS Drop forged and designed with a deep throat. Copper plated screw and

swivel pad to prevent weld splatter from sticking to them.



	Capacity Max. Min.		Screw Dia.	Order No.	Price
2	0	Depth 1-1/4	1/2	1907002	
3	0	1-1/4	1/2	1907002	
4	0	2-1/8	5/8	1907004	
6	Ö	2-7/8	3/4	1907006	
8	0	3-3/4	3/4	1907008	
10	3	4-3/4	3/4	1907010	
12	4	5-1/4	7/8	1907012	

SPRING CLAMPS

SERIES 179:

JET.

Steel Spring Clamps

· Nickel plated for durability and corrosion resistance.

- Tempered steel spring maintains substantial pressure at the jaw tips.
- · Ergonomic-shaped handles and jaws are available with polyvinyl covers for comfort, as well as protection of workpieces.



MODEL 636

Max. Open. Pipe Size			Ship Wgt. Ibs. Ea.	Model No.	Order No.	Price				
Stee	Steel Spring Clamps with protective handles & grips									
1"	4"	12	3/4	14896	1790634					
2"	6"	12	3/4	14897	1790636*					
3"	9"	6	1 1/4	14898	1790639					

*LIMITED QUANTITY

PARALLEL CLAMPS

SERIES 307:



Jaws are made of hardened and tempered steel. Clamps are equipped with spring clips.

Jaw Opening	Jaw Length	Order No.	Price Each
1-1/4	2	1910020	
1-3/4	2-1/2	1910025	
2-1/4	3	1910030	
2-3/4	4	1910040	
3-1/2	5	1910050	
4-1/2	6	1910060	
6	8	1910080	



"C" CLAMPS STEEL, NATURAL FINISH **SERIES 903:**



Deep Throat Pattern Parco-Lubrite Finish

Our most popular and versatile pattern. Frame is drop forged Carbon Steel; all other parts are machined from Carbon Steel.

WORK HOLDING DEVICES - CLAMPS



Deep Throat Pattern Zinc Plated

Design and materials are exactly the same as Parco-Lubrite finish. However, forcing screw is zinc plated to resist the adhesion of welding splatter.



Capa	city	Throat	Screw	Min.Proof	Weight	Order	
Max.	Min.	Depth	Dia.	Test, lbs.	lbs.	No.	Price
				Standard So	crew		
1-1/2	0	1-3/8	3/8	1400	.37	78401	
2	0	2	1/2	3300	1.25	78402	
3	0	2-3/8	1/2	3500	2.04	78403	
4	0	2-3/4	3/4	4100	2.96	78404	
6	0	3-5/8	3/4	5400	4.82	78406	
8	0	4-1/2	3/4	5900	6.81	78408	
10	3	5-3/8	3/4	6200	9.86	78410	
12	4	5-3/4	7/8	9300	12.69	78412	
10	0	5-3/8	3/4	6200	9.86	78411	
12	0	5-3/4	7/8	9300	12.96	78413	

Capa	city	Throat	Screw	Min. Proof	Weight	Order						
Max.	Min.	Depth	Dia.	Test, Ibs.	lbs.	No.	Price					
	Standard Screw											
1-1/2	0	1-3/8	3/8	1400	.37	78431						
2	0	2	1/2	3300	1.23	78432						
3	0	2-3/8	1/2	3500	2.11	78433						
4	0	2-3/4	3/4	4100	2.89	78434						
6	0	3-5/8	3/4	5400	4.83	78436						
8	0	4-1/2	3/4	5900	6.98	78438						
10	3	5-3/8	3/4	6200	9.66	78440						
12	4	5-3/4	7/8	9300	12.85	78442						
			Full	Length Scr	ew							
10	0	5-3/8	3/4	6200	9.66	78441						
12	0	5-3/4	7/8	9300	12.85	78443						

Deep Throat Pattern High Visibility Finish

Same in all respects-except for finish- as other Deep Throat C-Clamps, above. However, High Visibility Clamp Frames are finished in your choice of "Safety Yellow" or "Safety Orange" high-gloss bakedon enamel. Screws and handles are finished in black. Easy to see; hard to lose or misplace. High Visibility C-Clamps are furnished with standard screws only.



Сара	•	Throat			Weight	Order	
Max.	Min.	Depth	Dia.	Test, Ibs.	lbs.	No.	Price
				Ilow Frame			
1-1/2	1-1/2 0 1-3		3/8	1400	.37	78601	
2	0	2	1/2	3300	1.25	78602	
3	0	2-3/8	1/2	3500	2.04	78603	
4	0	2-3/4	3/4	4100	2.96	78604	
6	0	3-5/8	3/4	5400	4.82	78606	
8	0	4-1/2	3/4	5900	6.81	78608	
10	3	5-3/8	3/4	6200	9.86	78610	
12	4	5-3/4	7/8	9300	12.69	78612	
			Oı	range Frame			
1-1/2	0	1-3/8	3/8	1400	.37	78631	
2	0	2	1/2	3300	1.25	78632	
3	0	2-3/8	1/2	3500	2.04	78633	
4	0	2-3/4	3/4	4100	2.96	78634	
6	0	3-5/8	3/4	5400	4.82	78636	
8	0	4-1/2	3/4	5900	6.81	78638	
10	3	5-3/8	3/4	6200	9.86	78640	
12	4	5-3/4	7/8	9300	12.69	78642	

Tool Maker's Pattern Parco-Lubrite Finish

Small, lightweight C-Clamps are ideal for pattern making, wood working and other light duty applications. Both frame and screw are drop forged from Carbon Steel. Square below thumb screw head allows screw to be set up extra tight with a wrench.



			Throat	Screw		Order	
	Max.	Min.	Depth	Dia.	Weight	No.	Price
ſ	1	0	11/16	5/16	.25	78671	
ı	2	0	13/16	3/8	.46	78672	
ı	3	1	15/16	3/8	.56	78673	
	4	1-1/4	1-1/8	7/16	.92	78674	

While we show only the most popular **ARMSTRONG** items we can supply their entire range of products; please inquire.







Heavy Duty Pattern

The strongest C-Clamp made. Square-head screw has hardened point. Screw does not include a handle-it must be tightened with a wrench. Extra long hub helps prevent springing even under great stress.



Order	Capacity Inches		Throat	Screw	Min. Proof	Weight	
No.	Max.	Min.	Depth	Dia.	Test, lbs.	lbs.	Price
78000	13/16	0	5/8	3/8 - 16	2,800	.38	
78010	1-5/16	0	15/16	7/16 - 14	5,600	.74	
78015	1-3/4	0	1-7/16	5/8 - 11	8,750	1.91	
9978020	2-3/8	1/2	1-9/16	3/4 - 10	12,500	3.28	
78030	3-5/16	5/8	2	7/8 - 9	16,250	5.83	
78040	4-5/8	1	2-7/16	1 - 8	20,000	10.10	
78050	5-3/8	1-1/4	2-7/8	1 - 8	23,800	14.08	
78060	6-5/8	2-1/2	3-1/4	1-1/8 - 7	27,500	18.92	
78080	8-1/4	2-1/4	3	1-1/4 - 7	31,250	27.50	
78090	10-3/8	4-1/4	3-1/8	1-1/4 - 7	35,000	30.59	
78092	12-1/2	6-3/8	3-1/2	1-1/4 - 7	40,000	37.22	

Heavy Duty Pattern, With Full-Length Screw


Order	Capacity	Inches	Throat	Screw	Min. Proof	Weight	
No.	Max.	Min.	Depth	Dia.	Test, Ibs.	lbs.	Price
78021	2-3/8	0	1-9/16	3/4 - 10	12,500	3.28	
78031	3-15/16	0	2	7/8 - 9	16,250	5.83	
78041	4-5/8	0	2-7/16	1 - 8	20,000	10.10	
78051	5-3/8	0	2-7/8	1 - 8	23,800	14.08	
78061	6-5/8	0	3-1/4	1-1/8 - 7	27,500	18.92	
78081	8-1/4	0	3	1-1/4 - 7	31,250	27.50	
78091	10-3/8	0	3-1/8	1-1/4 - 7	35,000	30.59	
78093	12-1/2	0	3-1/2	1-1/4 - 7	40,000	37.22	



"T-SLOT" CLAMPS









A unique tool for holding down work on all machine tools equipped with slotted tables. Because they are drop forged from Carbon Steel, Armstrong T-Slot Clamps embody strength far beyond that required for normal clamping operations. And should any slight spring ever occur under extreme conditions, the drop forged frame will not take a permanent set. It's therefore safe to predict your Armstrong T-Slot Clamps will outlive the machine tools you intend to use them on. And over the years, they'll save countless hours of operator set-up time, paying for themselves many times over. Screw features Armstrong's patented ball-joint swivel padthe most secure and permanent system for locking pad to screw. Pad is V-notched to aid clamping of small rounds. T-Slot Clamp body, screw and handle are black finish. Each clamp is furnished with one T-Slot Bolt, Washer, and Hex Nut.

Order No.	Capacity In.	T-Slot Bolt Size, In.	Clamping Depth In.	Weight lbs.	Price
79401	0 to 2-1/4	1/2 x 1-1/2	2	2.29	
79403	0 to 3-1/4	5/8 x 2	2-1/4	4.62	
79405	0 to 3-1/4	3/4 x 2-1/2	2-1/4	5.00	

SET-UP WEDGES

SERIES 903:



Order No.	Lgth Inches	Width Inches	Max. Thickness Inches	Weight Ibs.	Price
79493	3	1	1/4	.11	
79495	5	1	1/2	.31	
79496	6	1-1/4	3/4	.68	

Tel: 201-518-8461 / Fax: 201-596-3427 650 Huyler St / So. Hackensack, NJ 07606 USA

400 SERIES C-CLAMPS

SERIES 179:

Drop Forged, Regular Duty, Extra Deep Throat

Wilton exclusive Perma-Pads® Hi-Tech frames - stronger and deeper throat depth.





This is Wilton's number one C-Clamp line.

- Series 400 clamps include all the Wilton innovations: drop-forged steel frame, extra throat depth, Perma-Pad®, lacquer finish - plus innovative design frame geometry for maximum strength.
- Spindles and Perma-Pads® are black oxide coated to resist corrosion.
- 400 Series bodies are heat treated.
- Spindle and pad are replaceable.
- Provided in individual boxes, Wilton 400 C-Clamps are high quality tools.

Opening Capacity	Throat Depth	Spindle Diameter	Min. Proof Test lbs.	Ship. Case Qty.	Ship. Wgt. Ibs. Ea.	Model No.	Order No.	Price
0" - 2 1/8" 0" - 3" 0" - 4 1/4" 0" - 6 1/16" 0" - 8 1/4" 2" - 10 1/8" 2" - 12 1/4"	2 1/4" 2 1/2" 3 1/4" 4 1/8" 5" 6" 6 5/16"	9/16" 9/16" 3/4" 3/4" 3/4" 3/4" 7/8"	3500 3500 6200 6600 6900 8000 9300	1 1 1 1 1 1	1-3/4 2-1/4 3-3/4 5-1/2 6-3/4 10-1/4 14-1/2	402 403 404 406 408 410 412	14214 14228 14242 14256 14270 14284 14298	



800 SERIES C-CLAMPS

SERIES 179:

Standard Throat - Regular Duty, Regular Throat Depth

- The 800 series is recommended at a value alternative for clamping work not requiring as much throat depth or clamping pressure as a 400 series clamp.
- 800 series are drop forged, equipped with Wilton Perma-Pads® and a precision-cut, single-lead, Acme thread.

Opening Capacity	Throat Depth	Spindle Diameter	Min. Proof Test Ibs.	Ship. Case Qty.	Ship. Wgt. Ibs. Ea.	Model No.	Order No.	Price
0" - 2" 0" - 3" 0" - 4" 0" - 6" 2" - 8" 1 1/2" - 10 "	1-13/16" 1-15/16" 2- 5/16" 2-15/16" 3-7/16" 3-3/4" 3-7/8"	9/16" 9/16" 5/8" 5/8" 3/4" 3/4"	2700 3000 3700 4500 5200 6000 8000	6 6 6 1	1-1/4 1-5/8 2-7/8 3-7/8 6-3/4 8-3/4	802 803 804 806 808 810	14714 14728 14742 14756 14770 14784 14798	

HARGRAVE C-CLAMPS

SERIES 179:

Super-Junior® Forged C-Clamps

- Super Junior® clamps are forged steel with heat treated frames to provide a much stronger clamp than pressed steel or malleable clamps.
- Steel screws are nickel plated for longer life.



	Opening Capacity	Throat Depth	Min. Proof Test Ibs.	Ship. Case Qty.	Ship. Wgt. Ibs. Ea.	Model No.	Order No.	Price
	0" - 1"	1"	500	12	1/4	50	921301	
١	0" - 1"	1-1/2"	500	12	1/4	51	21302	
1	0" - 1-1/4"	1-1/4"	800	12	1/4	52	921303	
١	0" - 1-1/2"	1-1/2"	850	12	1/4	53	21304	
١	0" - 2"	1-1/4"	875	6	1/4	54	21305	
1	0" - 3"	1-3/8"	1,100	6	1/2	55	21306	
١	0" - 2-1/2 "	2-1/2"	850	6	1/2	56	21307	

540-A SERIES C-CLAMPS

SERIES 179: Carriage C-Clamps



- High tensile ductile alloy casting provides excellent strength in a cast clamp.
- The 540 series is ruggedly constructed with a hardened steel spindle.
- Our carriage clamp is recommended for any work load which does not require the additional depth or strength of Series 400 C-Clamps or 800 series C-Clamps.

Opening Capacity	Throat Depth	Spindle Diameter	Min. Proof Test lbs.	Ship. Case Qty.	Ship. Wgt. Ibs. Ea.	Model No.	Order No.	Price
0 - 2-1/2" 0 - 3" 0 - 4" 0 - 6" 0 - 8" 0 - 10" 0 - 12"	1-3/4" 1-7/8" 2-1/16" 2-3/4" 3-1/4" 3-5/8" 3-5/8"	1/2" 1/2" 5/8" 5/8" 3/4" 7/8"	1100 1800 2150 2450 2750 2850 2850	6 6 6 1 1	1-3/4 1-1/2 2-1/8 3-1/4 5 6-7/8 8-1/2	540A-2 1/2 540A-3 540A-4 540A-6 540A-8 540A-10 540A-12	9999212 00213 00214 00215 00216 00217 00218	





Tel: 201-518-8461 / Fax: 201-596-3427

650 Huyler St / So. Hackensack, NJ 07606 USA

C-CLAMPS

SERIES 179:

Forged, Copper Spindle, High-Visibility C-Clamps Regular Duty, Extra Deep Throat



- Improved frame design allows for a higher proof test, greater throat depth, and lower overall weight.
- 400CS series offers a drop forged frame c-clamp with an anti-spatter, copper plated spindle, swivel pad, and cross-pin handle.
- Therefore, a tool that offers more uses, is easier to handle and creates less fatigue.
- Spindle threads are Acme roll threaded to provide user with maximum strength and clamping force.
- · Sliding pin handle with rounded, ergonomic ends.

Opening Capacity	Throat Depth	Spindle Diameter	Min. Proof Test Ibs.	Ship. Wgt. Ibs. Ea.	Model No.	Order No.	Price
0" - 2" 0" - 3" 0" - 4" 0" - 6" 0" - 8" 0" - 10 "	2" 2-3/8" 2-3/4" 3-5/8" 4-1/2" 5-3/8" 5-3/4"	1/2" 5/8" 3/4" 3/4" 3/4" 7/8" 7/8"	3500 3500 6500 6900 6900 8000 9500	1-1/2 1-3/4 2-3/4 4-3/4 8-1/2 10-1/2	H402CS H403CS H404CS H406CS H408CS H410CS H412CS	20479 20481 20483 20484 20485 20486 20487	

COPPER PLATED L-CLAMPS

L-Clamps fit a wide variety of applications. Perfect for jobs that require clamping wide or high parts, or where extreme throat depth is necessary.



- U.S. made replaceable Perma-Pads ® swivel to adapt to angular workpieces.
- U.S. made solid steel spindles are copper plated for anti-spatter resistance.
- U.S. made Wilton-Grip[™] soft rubber handles, standard on all 6300/6400 series models, provide comfortable grip.
- Improved clamping speed by sliding along rail to work. Use of L-Clamps expose less spindle screw and the clamp is less likely to twist and bend.
- One size L-Clamp can be used on multiple size (clamping) requirements.

Nominal Opening Capacity	Throat Depth	Nominal Rail Size	Nominal Clamping Pressure/lbs.	Nominal Spindle Diameter	Ship. Wgt. Ibs. Each	Model No.	Order No.	Price			
	Light Duty Copper Plated L-Clamp with Wilton-Grip™ Handles										
6" 8" 10" 12" 16" 20" 24" 32" 40"	3" 4" 4-3/4" 5-1/2" 4-3/4" 4-3/4" 4-3/4" 4-3/4"	5/8" x 5/16" 3/4" x 3/8" 7/8" x 7/16" 1" x 15/32" 1" x 15/32" 1" x 15/32" 1" x 15/32" 1-11/16" x 1/2" 1-11/16" x 1/2"	1000 1000 1500 1600 1600 1600 1600 2000 2000	1/2" 5/8" 5/8" 3/4" 3/4" 3/4" 3/4" 3/4" 3/4"	2 3 3-3/4 5 5-1/2 5-3/4 6-1/2 7-3/4 9	6306B STG 6308B STG 6310B STG 6312B STG 6316B STG 6320B STG 6324B STG 6332B STG 6340B STG	63249 63250 63251 963252 963253 63254 63255 63256 63257				
48"	48" 4-3/4" 1-11/16" x 1/2" 2000 3/4" 10-1/2 6348B STG 63258 Regular Duty Copper Plated L-Clamp with Wilton-Grip™ Handles										
ļ		,	Regular Duty Cop	pper Plated L-Ci	amp with wiito	n-Grip''" Handi	es				
10" 12" 16" 20" 32" 40"	4-3/4" 4-3/4" 4-3/4" 4-3/4" 4-3/4"	1-3/16" x 9/16" 1-3/16" x 9/16" 1-3/16" x 9/16" 1-3/16" x 9/16" 1-3/16" x 9/16" 1-3/16" x 9/16"	2600 2600 2600 2600 2600 2600	13/16" 13/16" 13/16" 13/16" 13/16" 13/16"	6-1/2 7-1/4 7-1/2 8-1/4 10-1/4 11-3/4	6410B STG 6412B STG 6416B STG 6420B STG 6432B STG 6440B STG	63259 963260 963261 963262 963263 963264				
			Heav	vy Duty Copper	Plated L-Clamp	os					
12" 16" 20" 24" 32" 40" 48"	7" 7" 7" 7" 7" 7"	1-9/16" x 3/4 1-9/16" x 3/4 1-9/16" x 3/4 1-9/16" x 3/4 1-9/16" x 3/4 1-9/16" x 3/4 1-9/16" x 3/4	4800 4800 4800 4800 4800 4800 4800	7/8" 7/8" 7/8" 7/8" 7/8" 7/8" 7/8"	12 13-1/4 14-1/2 15-1/2 17-3/4 20 22-1/2	6512B 6516B 6520B 6524B 6532B 6540B 6548B	963267 963268 63269 63270 63271 963272 963273				

ECONOMY SERIES L-CLAMPS

SERIES 179:

- Versatile, economy series L-Clamps are designed for economical repetitive clamping.
- Economy series offers generous throat depth, substantial clamping pressure with a competitive price.
- Swivel pads are cold pressed on to provide secure clamping.
- Black oxide spindle acts as a rust inhibiter.







Nominal Opening Capacity	Throat Depth	Nominal Rail Size	Nominal Clamping Pressure/lbs.	Nominal Spindle Diameter	Ship. Wgt. Ibs. Each	Model No.	Order No.	Price			
Economy L-Clamps											
6" 8" 10" 12" 16" 20" 24"	4-3/4" 4-3/4" 4-3/4" 4-3/4" 4-3/4" 4-3/4"	7/8" x 7/16" 7/8" x 7/16" 1-3/16" x 9/16" 1-3/16" x 9/16" 1-3/16" x 9/16" 1-3/16" x 9/16" 1-3/16" x 9/16"	1500 1500 2600 2600 2600 2600 2600	1/2" 5/8" 5/8" 3/4" 3/4" 3/4"	2 2 3 4 5 5 6	606 608 610 612 616 620 624	963056 63057 63058 963059 963191 963192 963193				

FLOAT LOCK VISE FOR **DRILL PRESSES**

SERIES 403:





Easy to mount in minutes. Expand the capacity of your machines boost production in a variety of setups. Work is tightly locked, or completely released by a quick turn of the hinged handle which operates the vise jaw. Vise turns on three sides, which permits drilling many holes without removing work.

The "T" bolt mounting clamp locks the vise securely at any position on the table, making it a dependable drill jig when large quantities of the same part are to be drilled. The mounting clamp also allows the vise to swing to the edge of the table for clamping long parts. When the vise is not in use the mounting clamp can quickly swing the vise completely off the table and out of the way eliminating the time consuming need of removal and storage.

Vises come complete with removable jaw pads and mounting clamp. Jaw pads feature Horizontal and Vertical "V" grooves that align and grip rounds securely. Parallel grooves make for easy alignment of jigs and fixtures.

Description	Order No.	Price
Float Lock Safety Vise for Drill		
Presses with 9" capacity and Thumb		
Release	4030009	
Float Lock Safety Vise for Drill		
Presses with 12" capacity and Thumb		
Release	4030012	
Optional Mounting Bracket for Drill		
Presses	4030000	





Ideal for fast setups on production pieces. With Float-Lock Band Saw Vise, you cut accurately and safely —all shapes and thicknesses of material; maximum capacity 10". Wide angle control (like steering a motorcycle) makes intricate sawing easy. Grip or release work with simple twist of handles. Handles never need to touch the work, assuring safety. Vise also reduces blade damage.

For hard-to-hold pieces, vertical cutting, automatic chain feed operation, irregular shapes and compound angle cutting. Allows intricate cutting while safely keeping hands away from the material.

Removable jaw pads feature Horizontal and Vertical "V:" grooves that align and grip rounds securely. Parallel grooves make for easy alignment of parts.

Description	Order No.	Price
Float Lock Safety Vise for Band Saws		
with 10" capacity	4030010	



See our Machinery Section for Drill Presses and Band Saws.



TOGGLE CLAMPS SERIES 611:



HOLD-DOWN ACTION CLAMPS (VERTICAL HANDLE)



No. 201



No. 202



Model No. 207-S



Model No. 210-S



Model No. 247-U

Model No.	Holding Capacity	Weight	Handle Moves	Bar Opens	Height Under Bar	Order No.	Price
201-U 202 202-U 207-S 207-U 207-UL 210-S 210-U 247-U	100 lbs. 200 lbs. 200 lbs. 475 lbs. 375 lbs. 350 lbs. 750 lbs. 600 lbs. 1000 lbs.	0.15 lbs. 0.33 lbs. 0.35 lbs. 0.69 lbs. 0.67 lbs. 0.75 lbs. 1.29 lbs. 1.29 lbs. 2.36 lbs.	60° 64° 64° 62° 62° 62° 58° 58°	110° 104° 104° 115° 115° 115° 106° 106°	0.63" 0.94" 0.94" 1.25" 1.25" 1.69" 1.69" 2.00"	952010 952020 952026 52080 52070 52074 52101 52100 52470	

Spindle assembly must be ordered separately on Model Nos. 207 & 210.

HOLD-DOWN ACTION CLAMPS (HORIZONTAL HANDLE)



Model No. 213-U



Model No. 225-U



Model No. 235-U

Please inquire for more dimensional information, line drawings, etc.

Model No.	Holding Capacity	Weight	Handle Moves	Bar Opens	Height Under Bar	Order No.	Price
213-U 217-U 227-U 237-U 215-U 225-U 235-U	150 lbs. 200 lbs. 500 lbs. 750 lbs. 200 lbs. 500 lbs. 750 lbs	0.17 lbs. 0.40 lbs. 0.68 lbs. 1.60 lbs. 0.32 lbs. 0.55 lbs. 1.47 lbs.	60° 76° 62° 63° 70° 70° 55°	90° 92° 92° 92° 90° 90°	0.75" 0.97" 1.31" 1.77" 1.03" 1.34" 1.75"	52130 52170 52270 52370 52150 52250 52350	

SQUEEZE ACTION CLAMPS



Model No. 424



Model No. 441



Model No. 462

Model No.	Holding Capacity	Weight	Jaw Opening	Order No.	Price
424	200 lbs.	0.31 lbs.	2.06"	954240	
441	350 lbs.	0.63 lbs.	2.86"	954410	
462*	700 lbs.	1.13 lbs.	4.10"	954620	

^{*} Trigger Release

FLAT-TIP BONDED NEOPRENE CAP

SPINDLE ASSEMBLIES

Cone-Tip Spindle Assemblies available. See our website or inquire.

Overall	Dia of]
Length	Tip	Thread (G)	EDP No.	Price	l
1.38	0.56	10-32	59816		
1.63	0.75	1/4-20	59803		
2.13	0.75	1/4-20	59805		
2.25	0.75	5/16-18	59807		
3.00	0.75	5/16-18	59812		
3.25	0.88	3/8-16	59809		
3.50	0.88	3/8-16	59815		
5.75	0.88	3/8-16	59808		ı
4.00	1.13	1/2-13	59820		1
5.00	1.38	5/8-11	59821		١١
1.00	0.56	8-32	59802		
1.25	0.56	8-32	59801		
1.00	0.63	1/4-20	59811		
1.50	0.63	1/4-20	59810		ı
	Length 1.38 1.63 2.13 2.25 3.00 3.25 3.50 5.75 4.00 5.00 1.00 1.25 1.00	Length Tip 1.38 0.56 1.63 0.75 2.13 0.75 2.25 0.75 3.00 0.75 3.25 0.88 3.50 0.88 5.75 0.88 4.00 1.13 5.00 1.38 1.00 0.56 1.25 0.56 1.00 0.63	Length Tip Thread (G) 1.38 0.56 10-32 1.63 0.75 1/4-20 2.13 0.75 1/4-20 2.25 0.75 5/16-18 3.00 0.75 5/16-18 3.25 0.88 3/8-16 3.50 0.88 3/8-16 5.75 0.88 3/8-16 4.00 1.13 1/2-13 5.00 1.38 5/8-11 1.00 0.56 8-32 1.25 0.56 8-32 1.00 0.63 1/4-20	Length Tip Thread (G) EDP No. 1.38 0.56 10-32 59816 1.63 0.75 1/4-20 59803 2.13 0.75 1/4-20 59805 2.25 0.75 5/16-18 59807 3.00 0.75 5/16-18 59812 3.25 0.88 3/8-16 59809 3.50 0.88 3/8-16 59815 5.75 0.88 3/8-16 59808 4.00 1.13 1/2-13 59820 5.00 1.38 5/8-11 59821 1.00 0.56 8-32 59802 1.25 0.56 8-32 59801 1.00 0.63 1/4-20 59811	Length Tip Thread (G) EDP No. Price 1.38 0.56 10-32 59816 59803 59812 59803 59812 59809 59809 59815 59809 59815 59808 59815 59808 59808 59808 59808 59808 59808 59808 59801 59801 59802 59802 59802 59801 59801 59801 59801 59801 59801 59812 59811 59812 59811 59812 59812 <td< th=""></td<>





TOGGLE CLAMPS SERIES 611:



PULL ACTION CLAMPS (VERTICAL HANDLE)

Model No.	Holding Capacity	Weight	Drawing Movement	Hook Adjustment	Order No.	Price
324	500 lbs.	0.25 lbs.	1.53"	0.63"	9953240	
334	1000 lbs.	0.60 lbs.	2.00"	0.69"	53340	
344	2000 lbs.	1.50 lbs.	2.50"	1.19"	53440	



PULL ACTION CLAMPS (HORIZONTAL HANDLE)










Model No. 375

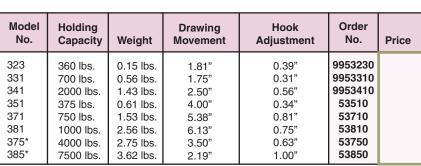

While we show the most popular items, we can supply their entire range of products including metric models. See our website or inquire.

STRAIGHT-LINE ACTION CLAMPS



Model No.	Holding Capacity	Weight	Plunger Travel	Plunger Thread	Plunger Height	Order No.	Price
601 602 604 624 603 605 607 608 630 640 650	100 lbs. 200 lbs. 300 lbs. 700 lbs. 600 lbs. 300 lbs. 800 lbs. 850 lbs. 2500 lbs. 7500 lbs. 16000 lbs.	0.09 lbs. 0.25 lbs. 0.44 lbs. 1.63 lbs. 0.83 lbs. 0.69 lbs. 1.63 lbs. 1.25 lbs. 1.90 lbs. 6.71 lbs. 5.59 lbs.	0.63" 0.75" 1.50" 2.63" 1.25" 1.63" 1.63" 2.00" 4.00" 3.00"	8-32 1/4-20 5/16-18 3/8-16 5/16-18 5/16-18 3/8-16 3/8-16 1/2-13 5/8-11	0.50" 0.50" 0.63" 0.88" 0.97" 0.69" 1.25" 0.81" 1.25" 2.25"	9956010 56020 956040 56240 956030 56050 56070 956080 56300 9956400 9956500	

^{*}Latch plate must be ordered separately.

Tel: 201-518-8461 / Fax: 201-596-3427 650 Huyler St / So. Hackensack, NJ 07606 USA

HORIZONTAL HANDLE TOGGLE CLAMPS


SERIES 321:






Holding Capacity: 60 lbs. Handle Moves 80°, Bar 90°

Order No. 51100 Price




Holding Capacity: 200 lbs. Handle Moves 60°, Bar 85°

Order No. 51110 Price



Holding Capacity: 500 lbs. Handle Moves 65°, Bar 90°

Order No. 51120 Price



Holding Capacity: 750 lbs. Handle Moves 50°, Bar 85°


Order No. 51130 Price

Order No.	Description	А	В	С	D	Е	F	G	Н	I	J	K	L	М	N	0	Capacity	Weight
51100	U-bar, Flanged BaseIn	.63	.63	.95	.93	.25	.16	.38	.17	2.42	.41	.53	3.19	-	.63	-	60lbs	1.5oz
	mm	16.0	16.0	24.1	23.6	6.54	4.28	9.7	4.3	61.5	10.4	13.5	81.0	-	16.0	-	27kg	43gr
51110	U-bar, Flanged Baseln	1.00	.88	1.50	1.34	.25	.20	.45	1.47	1.56	1.00	1.46	5.58	-	2.10	-	200lbs	4.6oz
	mm	25.4	22.4	38.1	34.1	6.54	5.1	11.5	37.3	39.6	25.4	37.1	141.7	-	53.3	-	90kg	13gr
51120	U-bar, Flanged BaseIn mm	1.00 25.4	.88 22.4	1.57 39.8	1.40 35.5	-	.27 6.9	.60 15.2	1.37 34.8	1.87 47.5	1.38 35.1	1.84 46.7	6.63 169.2	-	2.75 69.9	-	500lbs 227kg	9.4oz 256gr
51130	U-bar, Flanged Baseln mm	1.63 41.4		2.25	2.25 57.2	-	.33	.74	2.50	2.50	1.75 44.5	2.50	10.4 263.8	-	4.31 109.5	-	750lbs 340kg	22.6oz 640gr

VERTICAL HANDLE TOGGLE CLAMPS

SERIES 321:






Holding Capacity: 100 lbs. Handle Moves 56°, Bar 100°

Order No. 9950100 Price






Holding Capacity: 200 lbs. Handle Moves 60°, Bar 100°

Order No. 9950110 Price






Holding Capacity: 500 lbs. Handle Moves 60°, Bar 100°

Order No. 950120 Price






Holding Capacity: 750 lbs. Handle Moves 58°, Bar 105°

Order No. 950130
Price





Holding Capacity: 1000 lbs. Handle Moves 70°*, Bar 135°*

		,	
Order	No.	950	0140
Price			

Order No.	Description	Α	В	С	D	Е	F	G	Н	1	J	K	L	М	N	0	Capacity	Weight
9950100	U-bar, Flanged Base, In	.63	.94	1.00	1.33	-	.17	.36	.79	3.20	.65	.98	2.20	-	-	-	100lb	2.4oz
	Straight Handle mm	16.0	23.9	25.4	33.8	-	4.3	9.1	20.1	81.3	16.5	24.9	55.9	-	-	-	45kg	68gr
9950110	Fixed Spindle, Flanged In	.50	1.06	1.00	1.56	-	.19	.53	-	3.90	.93	1.30	2.50	-	-	-	200lb	5.1oz
	Base, Straight Handle mm	12.7	26.9	25.4	39.6	-	4.8	13.5	-	99.1	23.6	33.1	63.5	-	-	-	90kg	145gr
950120	Short U-bar, Flanged In	.75	1.25	1.53	1.89	-	.28	.62	2.02	6.31	1.64	2.16	4.55	-	2.80	-	500lbs	11.7oz
	Base, Straight Handle mm	19.1	31.8	38.8	48.1	-	7.1	15.7	51.3	161.0	41.6	54.9	115.6	-	71.1	-	227kg	332gr
950130	U-bar, Flanged Base, In	1.25	1.83	1.93	2.55	-	.320	.726	2.47	7.75	1.61	2.36	5.60	-	-	-	750lbs	6.95oz
	Straight Handle mm	31.8	46.5	49.0	64.8	-	8.1	18.4	62.7	196.9	40.9	59.9	142.2	-	-	-	340kg	197gr
950140	U-bar, Flanged Base, In	1.25	1.93	2.00	2.53	-	.330	.920	3.06	8.88	1.90	2.75		-	5.00	-	1000lbs	3.2oz
	Straight Handle mm	31.8	49.0	50.8	64.3	-	8.4	23.4	77.7	225.6	48.5	69.9		-	127.0	•	450kg	145gr

*Without Roll Pin. With Roll Pin - Handle Move 58°, Bar 100°

PUSH / PULL TOGGLE CLAMPS


SERIES 321:





Holding Capacity: 300 lbs. Plunger Travel: 1-1/4 in. (32mm)


Order No. 952120 **Price**



Holding Capacity: 800 lbs. Plunger Travel: 1-5/8 in. (41.1mm)


Order No. 52160 **Price**






Holding Capacity: 2500 lbs. Plunger Travel: 1.63 in. (41.1mm)

Order No. 52190 **Price**



Holding Capacity: 300 lbs. Plunger Travel: 1-1/2 in. (38mm)


Order No. 52101 **Price**



Holding Capacity: 700 lbs. Plunger Travel: 2-19/32 in. (66.8mm)

Order No. 52102 **Price**






Holding Capacity: 375 lbs

Order No. 9953110 **Price**



Holding Capacity: 360 lbs

Order No. 53160 **Price**



Holding Capacity: 700 lbs.

Order No. 9953170 **Price**



Holding Capacity: 2000 lbs.

Order No. 53180 **Price**

Order No.	Description		Α	В	С	D	Е	F	G	Н	- 1	J	K	L	М	N	0	Capacity	Weight
952120	Push/Pull	In	1.40	1.63	3.60	2.19	5/16-18	.220	.429	1.28	3.27	.968	-	5.52	-	1.74	-	300lbs	10.5oz
	Internal Threads	mm	3.55	41.5	91.4	55.5	-	5.6	10.9	32.6	83.2	24.6	-	140.3	-	44.2	-	136kg	300gr
52160	Push/Pull	In	1.63	1.63	2.25	2.25	3/8-16	.34	.63	1.63	4.56	1.70	-	6.75	-	3.84	-	800lbs	28oz
	Internal Threads	mm	41.4	41.4	57.2	57.2	-	8.6	16.0	41.4	115.8	43.2	-	171.5	-	97.5	-	364kg	800gr
52190	Push/Pull	In	1.38	1.63	5.02	2.30	3/8-16	.34	.62	1.97	3.14	.85	-	7.25	1.82	2.20	1.63	2500lbs	33.0oz
	Internal Threads	mm	35.1	41.4	127.6	58.4	-	8.6	15.7	50.1	79.8	21.6	-	184.1	46.2	55.9	41.4	1136kg	935gr
52101	Plunger Clamp	In	3/4-16	.63	.69	.25	1.25	5/16-18	.44	1.50	3.88	4.75	1.00	4.75	-	-	-	300lbs	9.5oz
	w/ Threaded Collar	mm	-	15.9	17.62	6.58	31.8	-	11.1	38.1	98.6	120.7	25.4	120.7	-	-	-	136kg	270gr
52102	Plunger Clamp	In	1-14	.88	1.00	.188	1.56	3/8-16	.63	2.63	5.56	6.69	1.25	6.69	-	-	-	700lbs	24.3oz
	w/ Threaded Collar	mm	-	22.2	25.4	4.8	39.6	-	15.9	66.8	141.2	169.9	31.8	169.9	-	-	-	318kg	690gr
9953110	Latch Type, Flanged	In	.75	1.38	1.50	1.94	.31	.22	.50	-	1.36	.75	-	8.63	-	6.09	2.25	375lbs	9.5oz
	Base, Straight Handle	mm	19.1	35.1	38.1	49.3	7.9	5.6	12.7	-	34.7	19.1	-	219.2	-	154.7	57.1	170kg	270gr
53160	Latch, Flanged Base,	In	.63	.75	1.03	1.11	.17	.17	8-36	.39	1.29	.47	.75	3.47	2.20	2.11	1.19	360lbs	1.5oz
	Straight Handle	mm	16.0	19.1	26.2	28.2	4.3	4.3	-	9.9	32.9	11.9	19.1	88.1	55.9	55.2	30.2	163.6kg	42gr
9953170	Latch, Flanged Base,	In	.75	1.24	1.65	1.75	.280	.273	1/4-20	.46	1.77	.60	1.00	5.70	1.12	3.52	2.00	700lbs	7.0oz
	T-Handle	mm	19.1	31.5	41.9	44.5	7.2	6.9	-	11.7	44.9	15.3	25.4	144.8	28.4	89.4	50.8	318kg	196gr
53180	Latch, Flanged Base,	In	1.65	1.50	2.57	2.47	.33	.33	5/16-20	.75	2.53	.85	1.49	7.50	1.50	5.04	3.33	2000lbs	24oz
	T-Handle	mm	41.9	38.1	65.3	62.7	8.4	8.4	-	19.1	64.2	21.6	37.8	190.5	38.1	128.1	84.6	900kg	680gr


FLAT CUSHION-TIP BONDED SPINDLE ASSEMBLIES




Order No.	Part No.	Description	Price
955110	FC-10138	10-24 x 1 3/8	
955120	FC-14134	1/4-20 x 1 3/4	
955125	FC-14218	1/4-20 x 2 1/8	
55130	FC-56212	5/16-18 x 2 1/2	
55135	FC-56300	5/16-18 x 3	
55140	FC-38312	3/8-16 x 3 1/2	
955145	FC-38412	3/8-16 x 4 1/2	
55150	FC-12334	1/2-13 x 3 3/4	



Order No.	Part No.	Description	Price
9955310	CC-10138	10-24 x 1 3/8	
55320	CC-14134	1/4-20 x 1 3/4	
55325	CC-14218	1/4-20 x 2 1/8	
55330	CC-56212	5/16-18 x 2 1/2	
55340	CC-38312	3/8-16 x 3 1/2	



FOR "U" BAR CLAMPS ONLY



NEOPRENE CAPS

